

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)


PCT

(10) International Publication Number
WO 2004/010649 A1

- (51) International Patent Classification⁷: H04L 12/26, H04Q 7/38, H04L 12/56
- (21) International Application Number: PCT/IB2002/002841
- (22) International Filing Date: 19 July 2002 (19.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MÄKINEN, Teemu [FI/FI]; Tanhumäentie 23 B 1, FIN-04420 Jarvenpää (FI). SANDAS, Ulf [FI/FI]; Ruutikatu 8 A 24, FIN-02600 Espoo (FI). GULBANI, Giorgi [GE/FI]; Kyyhkysmäki 13 B 21, FIN-02600 Espoo (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: INFORMING A LAWFUL INTERCEPTION SYSTEM OF THE SERVING SYSTEM SERVING AN INTERCEPTED TARGET

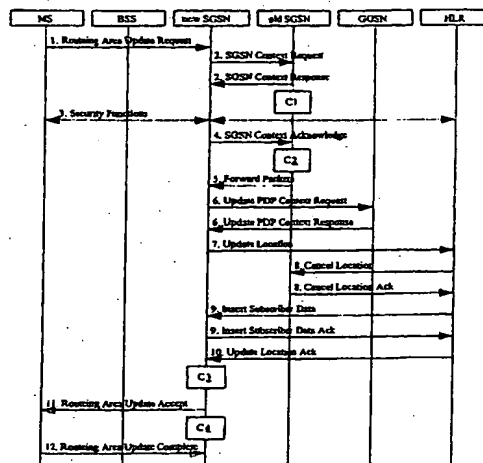

(57) Abstract: The present invention proposes a method for informing a lawful interception system of the serving system serving an intercepted target (MS) roaming within a communication network system, the communication network system comprising at least one serving system each serving system comprising at least one serving system node (SGSN) serving the intercepted target for communication, the method comprising the steps of: first detecting a serving system node change request (1.) from the intercepted target (MS) towards a new serving system node which is currently not serving the target, first processing said serving system node change request at said new serving system node currently not serving the target, wherein said processing comprises the inclusion, to the request, of a serving system address of the new serving system node currently not serving the target, and first forwarding said processed request (2.) to an old serving system node currently serving the target. Also, the present invention proposes a serving system node adapted to be used in such a method.

WO 2004/010649 A1